

TOSHIBA

e-STUDIO2528A

e-STUDIO3028A

e-STUDIO3528A

e-STUDIO4528A

e-STUDIO5528A

e-STUDIO6528A

Datasheet

- High-performance A3 monochrome multi-functional systems with speed up to 65 ppm for demanding print, copy, scan, and fax applications
- Wide range of integration options through powerful e-BRIDGE Next system platform
- High level of usability due to individually designable user interface as well as additional individual programming
- Maximum protection of sensitive data through numerous security functions such as hard disk encryption and access authorisations
- Environmental protection at the highest level: low energy consumption as well as energy-saving mode help to preserve resources



Specifications

General

| | |
|--------------------------------|--|
| Print & Copy Speed | A4: 25/30/35/45/55/65 ppm A3: 16/16/25/25/27/30 ppm |
| Warm-up Time | ~ 14/14/16/16/20/20 seconds from low power mode |
| Paper Size & Weight | Cassette ⁽¹⁾ : A5R-A3, 60-256 g/m ² Cassette ⁽²⁾ : A5R-A3 / A5R-320 x 460 mm, 60-300 g/m ² Bypass ⁽¹⁾ : 100x148 mm-A3, 52-256g/m ² Bypass ⁽²⁾ : 100x148 mm-320 x 460 mm, 52-300g/m ² Banner paper: up to 305 x 1,200 mm, 90-163 g/m ² |
| Paper Capacity | Cassettes: 2x 550 sheets Bypass: 1x 100 sheets Max. 5,200 sheets |
| Inner Output Tray | 400-sheet capacity ⁽²⁾ , 550-sheet capacity ⁽¹⁾ |
| Automatic Duplex | A5R-A3, 60-256 g/m ² |
| Controller Type | Toshiba e-BRIDGE Next |
| Control Panel | 26 cm (10.1") Multi-Touch Colour Panel |
| Memory | Security SSD 128 GB ^{(1),(3)} , 4 GB RAM Security SSD 128 GB ^{(2),(3)} , 6 GB RAM |
| Interface | 10Base-T/100Base-TX/1000Base-T, High Speed USB 2.0, WLAN* (IEEE802.11b/g/n), Bluetooth*, Wi-Fi Direct* |
| Dimension & Weight | For e-STUDIO2528A/3028A: 585 x 586 x 787mm (W x D x H), ~55kg For e-STUDIO3528A/4528A: 585 x 586 x 787mm (W x D x H), ~57kg For e-STUDIO5528A/6528A: 585 x 641 x 787mm (W x D x H), ~72 kg |
| Starting Kit | Drum, Developer ⁽²⁾ , Waste Toner Box ⁽²⁾ |

Print

| | |
|----------------------------------|--|
| Resolution | 600 x 600 dpi, 1 bit, equiv. 2,400 x 600 dpi (with PostScript Driver) ⁽¹⁾ 1200 dpi x 1200 dpi, 2 bit, equiv. 3,600 x 1,200 dpi (with PostScript Driver) ⁽²⁾ |
| Page Description Language | PCL5e, PCL5c, PCL6 (PCL XL), XPS, PDF, and PostScript 3 |
| Supported Systems | Windows 11/10/8.1, Windows Server 2022/2019/2016/2012 R2/2012 (64bit), Mac OS 10.12-12, Linux/Unix, Citrix, SAP, AS/400 |
| Network Protocols | TCP/IP (IPv4/IPv6), NetBios over TCP/IP |
| Mobile Printing | e-BRIDGE Print & Capture, Mopria® Print Service, AirPrint |
| Print Functions | Universal Printer Driver, Driver Templates, Driver plug-ins*, Print from USB, Hold Print, Tandem Printing, E-Mail direct printing |

Scan

| | |
|-----------------------|---|
| Resolution | Max. 600 x 600 dpi |
| Scan Speed | Reversing Automatic Document Feeder (RADF)*: up to 73 ppm (300 dpi) in colour and monochrome Dual Scan Document Feeder (DSDF)*: up to 240ppm (300dpi) in colour and monochrome |
| Scan Modes | Auto-Colour (ACS), Colour, Greyscale, Monochrome |
| File Formats | JPEG, Multi/Single Page TIFF/XPS/PDF, Secure PDF, Slim PDF, PDF/A, PDF/A-2, Searchable PDF* (and other formats like DOCX, XLSX) |
| Scan Functions | WS Scan, Scan to USB, Scan to E-Mail, Scan to File (SMB, FTP, FTPS, Local), Meta Scan*, OCR scan, Scan to Box (e-Filing), WIA, TWAIN |

Copy

| | |
|-------------------------------|--|
| Resolution | Scan: 600 x 600 dpi Print: 600 x 600 dpi, 1 bit ⁽¹⁾ / 600 x 600 dpi, 5 bit ⁽²⁾ equiv. 2,400 x 600 dpi (with smoothing) |
| First Copy Output Time | ~ 4.3/4.3/3.6/3.6/4.3/4.3 seconds |
| Zoom | Platen*: 25-400%, RADF*/DSDF*: 25-200 % |
| Copy Modes | Text, Text/Photo, Photo, Custom |
| Copy Functions | Electronic Sort, Rotate Sort, ID Card Copy, Edge Erase, 2-in-1 / 4-in-1 mode |

Fax*

| | |
|-----------------------------|---|
| Communication | Super G3, G3 - (opt. 2 nd line) |
| Transmission Speed | ~ 3 seconds per page |
| Compression | JBIG, MMR, MR, MH |
| Fax Memory | 1 GB Transmission/Reception |
| Network-Fax | Driver for Windows 11/10/8.1, Windows Server 2022/2019/2016/Server 2012 R2/Server 2012 (64bit) |
| Incoming Fax Routing | To shared folders (SMB, FTP), E-Mail, e-Filing |

System & Security

| | |
|----------------------------------|--|
| Device Management | Top Access for remote administration and configuration |
| System Features | e-Filing document server for secure storage, Document distribution and Print-on-Demand (one public box, 200 user boxes), 12,060 one-touch templates for storage of personalised settings and workflows, Scan/Fax Preview, Rip-while-Print, e-BRIDGE Open Platform, Embedded Web Browser, Job Skip, PCL Barcode printing, e-BRIDGE Plus embedded apps |
| Accounting & Security | Role Based Access, LDAP support, 1,000 department & 10,000 user codes, Card Reader*, Private Print, Standard data encryption with Security SSD, Data Overwrite function when optional HDD is chosen, IP and MAC address filter, Port Filter, Support of SSL and IPsec ⁽¹⁾ protocols, IEEE802.1x support, CC certified (ISO/IEC15408) with HCD-PP v1.0*, Scan to Secure PDF |



⁽¹⁾ For e-STUDIO2528A/3028A/3528A/4528A

⁽²⁾ For e-STUDIO5528A/6528A


⁽³⁾ 1 GB = 1 billion bytes; the actual formatted capacity is less.
Available capacity will also be less if software applications are pre-installed.

* Optional

Options

| | | | |
|--|--|---|--|
| REVERSING AUTOMATIC DOCUMENT FEEDER-MR-3033 | 100-sheet capacity, A5R-A3, 35-157 g/m ² | PLATEN COVER-KA-5005PC | |
| DUAL SCAN DOCUMENT FEEDER-MR-4010 | 300-sheet capacity, A5R-A3, 35-209 g/m ² | DESK-MH-5005 | |
| DUAL SCAN DOCUMENT FEEDER WITH DOUBLE FEED DETECTION-MR-4020 | 300-sheet capacity, A5R-A3, 35-209 g/m ² | HARD DISK DRIVE 320 GB⁽³⁾(FIPS 140-2 STANDARD incl. Data Overwrite)-GE-1260 | |
| PAPER FEED PEDESTAL-KD-1072 | 550-sheet capacity (1 Cassette), A5R-A3, 60-256 g/m ² ⁽¹⁾ , 60-300 g/m ² ⁽²⁾ | SECURITY SOLID STATE DRIVE 512 GB⁽³⁾-GE-1280 | |
| DRAWER MODULE -MY-1052 | For Paper Feed Pedestal 550-sheet capacity (1 Cassette) A5R-A3, 60-256g/m ² ⁽¹⁾ , 60-300 g/m ² ⁽²⁾ | WORK TRAY-KK-5005 | |
| ENVELOPE DRAWER-MY-1053 <small>(can also be used for standard paper)</small> | For Paper Feed Pedestal or 2 nd Cassette Envelopes: 50-envelope capacity (1 Cassette), 100 x 162mm - 240 x 380 mm, 60-85 g/m ² Paper: 550-sheet capacity, A5R-A4R, 60-256 g/m ² ⁽¹⁾ , 60-300 g/m ² ⁽²⁾ | JOB SEPARATOR-MJ-5015 | |
| LARGE CAPACITY FEEDER-KD-1073A4 | 2,000 sheets, A4, 60-256 g/m ² ⁽¹⁾ , 60-300 g/m ² ⁽²⁾ | FAX BOARD-GD-1370EU | |
| EXTERNAL LARGE CAPACITY FEEDER-MP-2002A | 2,000 sheets, A4, 60-256 g/m ² ⁽¹⁾ , 60-300 g/m ² ⁽²⁾ | USB HUB-GR-1420 | |
| INNER FINISHER-MJ-1048 | 2 trays, 600-sheet capacity 50-sheet multi-position stapling A4R-A3, 60-105 g/m ² (stapling mode) | ACCESSORY TRAY-GR-1330 | |
| MULTI-STAPLE FINISHER-MJ-1113 | 2 trays, 2,250-sheet capacity 65-sheet multi-position stapling A4R-A3, 60-105 g/m ² (stapling mode) | PANEL TEN-KEY-GR-1340 | |
| SADDLE STITCH FINISHER-MJ-1114 | 2 trays, 3,250-sheet capacity Saddle-stitched booklets of up to 60 pages 65-sheet multi-position stapling A4R-A3, 60-105 g/m ² (stapling mode) | WIRELESS LAN/BLUETOOTH MODULE (incl. Wi-Fi Direct)-GN-4030-A3 | |
| HOLE PUNCH UNIT-MJ-6107E,MJ-6107F,MJ6107S MJ-6011E,MJ-6011F,MJ6011S | Available in 2- and 4- holes - for Finisher MJ-1113/MJ-1114 - for Finisher MJ-1048 | CARD READERS | |
| | | ACCESSIBLE ARM-KK-2560 | |
| | | IPsec ENABLER (LICENCE)-GP-1080Node | |
| | | MULTI STATION PRINT ENABLER (LICENCE)-GS-1090Node | |
| | | META SCAN ENABLER (LICENCE)-GS-1010Node | |
| | | UNICODE FONT ENABLER (LICENCE)-GS-1007Node | |
| | | BRIDGE KIT-KN-5005 | |

Configuration

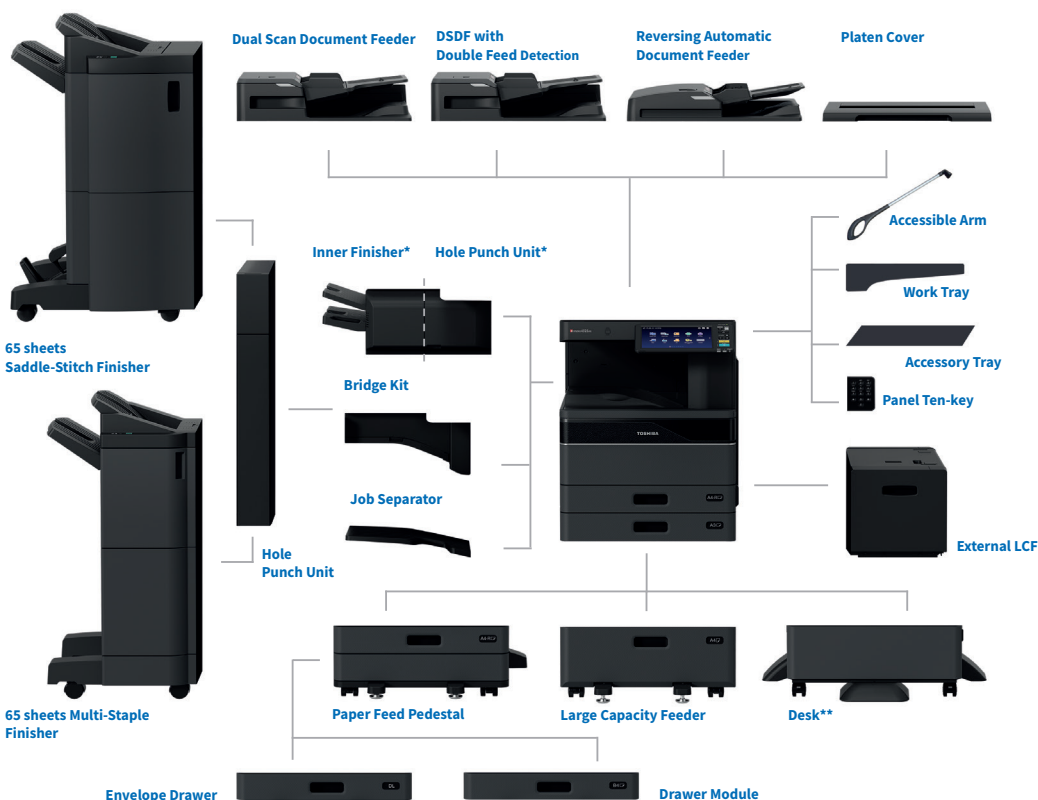

* Fore-STUDIO2528A/3028A/3528A/4528A
** Not in combination with External LCF

About Toshiba Tec

Toshiba Tec Germany Imaging Systems GmbH is part of the globally operating Toshiba Tec Corporation, active in various high-tech industrial sectors.

Toshiba Tec Corporation is a leading provider of information technology, operating across multiple industries - ranging from retail, education and business services to hospitality and manufacturing. With headquarters in Japan and over 80 subsidiaries worldwide, Toshiba Tec Corporation helps organisations transform the way they create, record, share, manage and display information.

For more information please contact us:

Toshiba Tec Germany Imaging Systems GmbH

Carl-Schurz-Str. 7
41460 Neuss
Germany

Telephone

+49 2131-1245-0

Fax

+49 2131-1245-402

Website

www.toshibatec.eu



Together Information is Toshiba's vision for how people and organisations create, record, share, manage and display ideas and data.

It is based on our belief that the most successful organisations are those that communicate information in the most efficient way.

We make that possible through an integrated portfolio of industry-specific solutions, all of which reflect Toshiba's commitment to the future of the planet.

